



- ① TO REMOVE SWITCH ASSY, REMOVE SCREWS AND PUSH ON BACK OF SWITCH

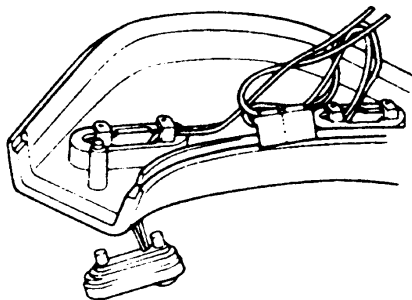

- ② PUSH SWITCH OUT AND ROTATE

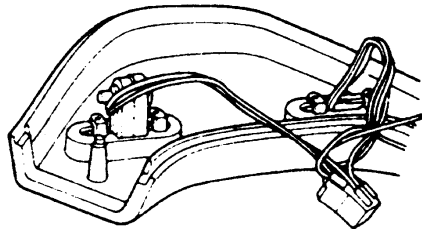

- ③ INSERT END OF SWITCH INTO HOLE AND REMOVE SWITCH.
TO INSTALL SWITCH ASSY, REVERSE PROCEDURE