


**INSTALL UPPER ARMS TO  
BODY BRACKET — USE NEW BOLTS  
AND NUTS. TIGHTEN TO 98-132 N·m  
(73-97 LB-FT)**

**INSTALL UPPER ARMS  
TO SPINDLE. USE NEW  
NUT. TIGHTEN TO 203-258 N·m  
(150-190 LB-FT)**

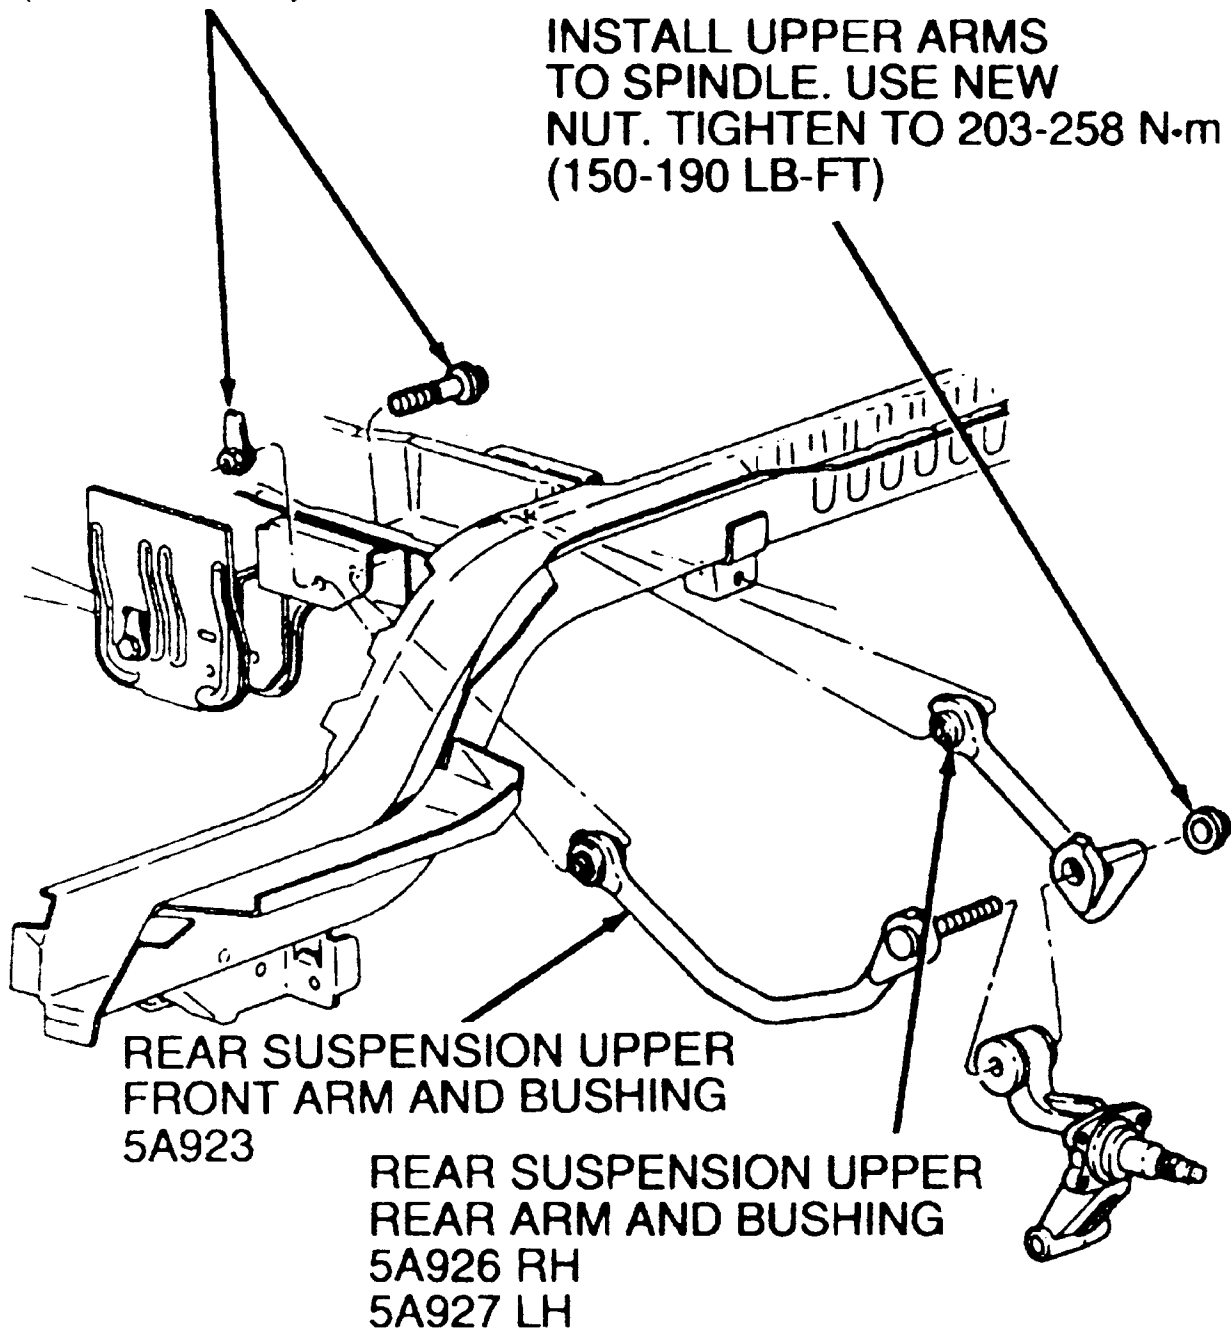

**REAR SUSPENSION UPPER  
FRONT ARM AND BUSHING  
5A923**

**REAR SUSPENSION UPPER  
REAR ARM AND BUSHING  
5A926 RH  
5A927 LH**