


INSTALL IGNITION SWITCH
AND COVER WITH TWO
TORX® HEAD BOLTS
TIGHTEN TO
3.4-5.4 Nm (30-48 LB.IN.)

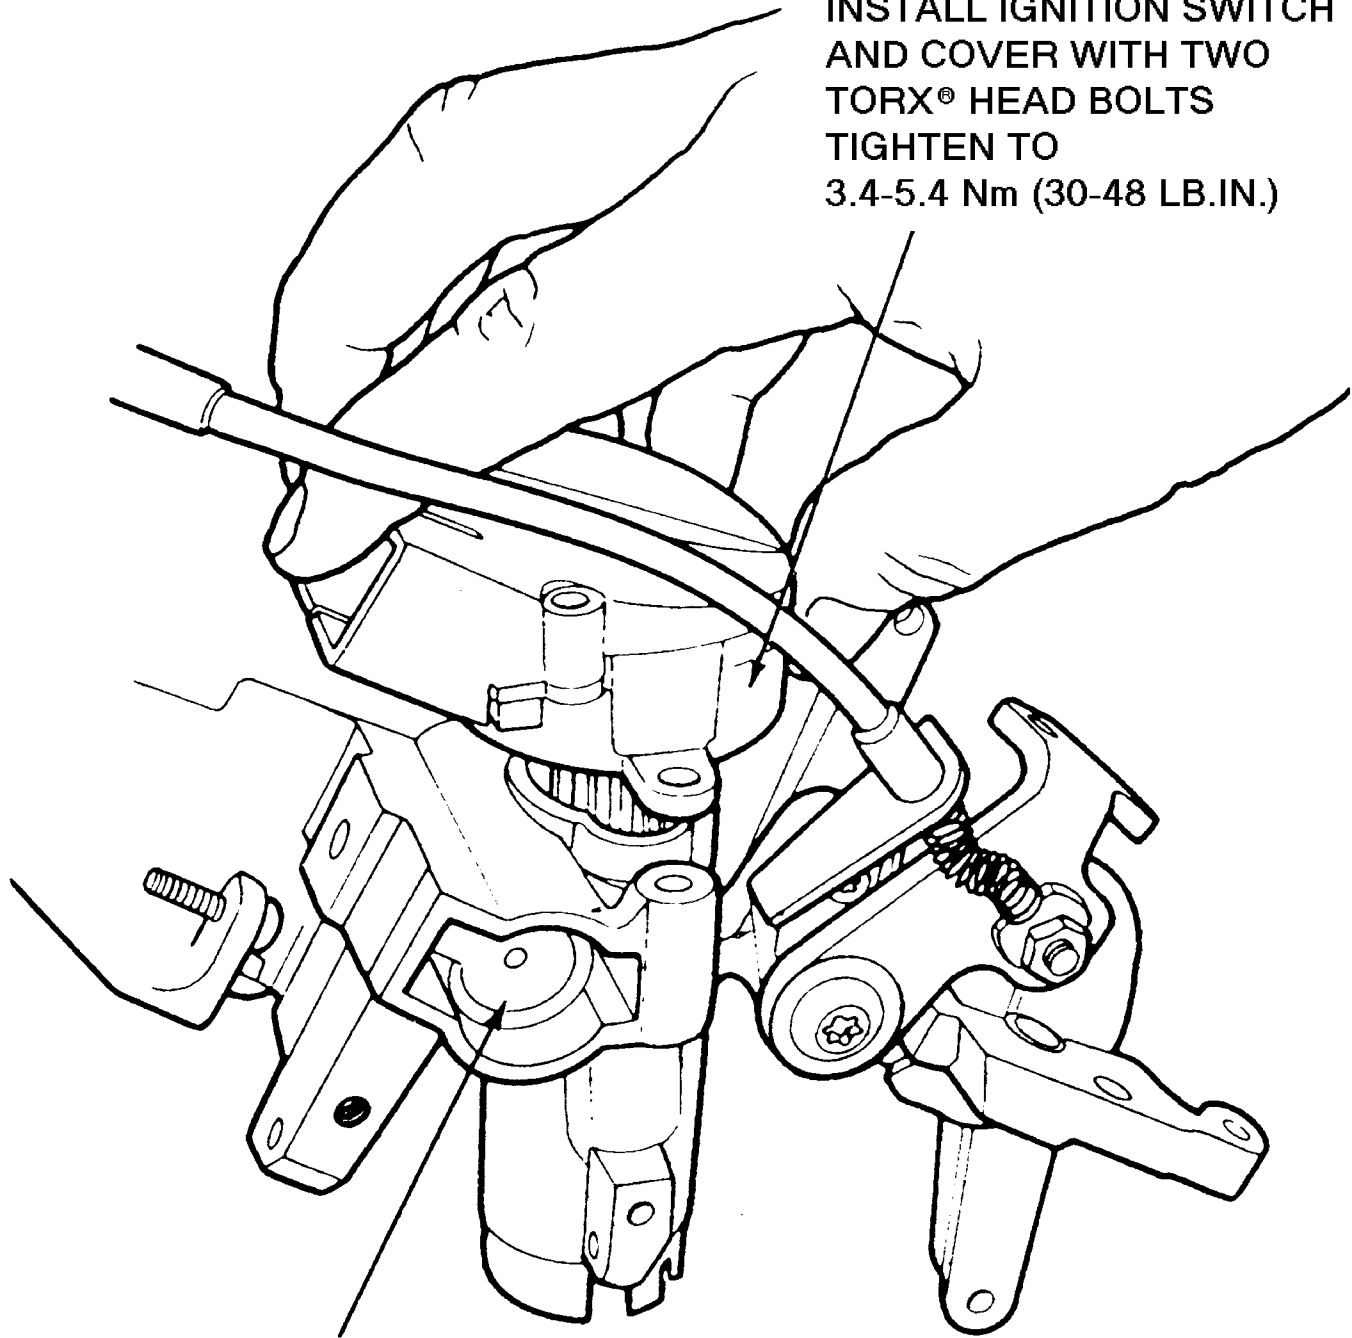

HOLD LOCK ACTUATOR
IN POSITION (AT PROPER DEPTH)
AND INSTALL IGNITION SWITCH